


Roll-in Machinery

Labor-saving Automation
Automatically pre-fills extruded lineals

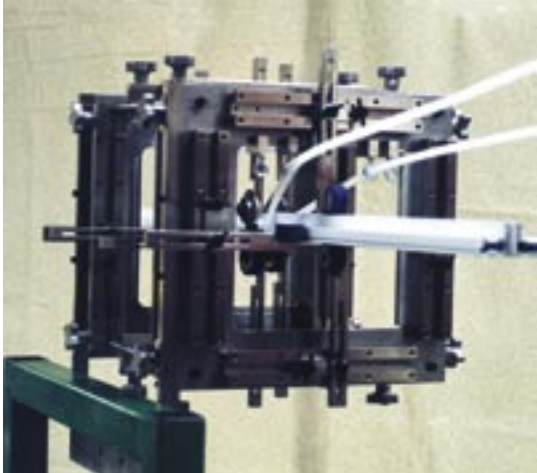

- Inserts ULTRAFAB's patented Roll-Loc® weatherseal into vinyl sash and frame lineals during the extrusion process
- Operates mechanically without electrical power or compressed air
- Mounts directly in line with the extruder and will not affect line speed
- Also available on a "swing-away" mounting bracket
- Durable mechanical design is lightweight and easy to install. Can be installed or removed while line is running
- Customizable for all sash and frame shapes
- Enables extruders to ship pre-filled lineals to fabricators with minimal additional labor
- Roll-Loc® weatherseal can be used; it has two special legs on the backing which provide permanent slip-free locking in the T-slot
- Roll-In machine can accommodate up to three roll in wheels to fill three T-slots without modifying the equipment
- Custom configuration is available which can fill up to eight T-slots and can accommodate extra large profiles
- Reel stands are available at an additional cost

ULTRAFAB[®]

Tel: 800-535-1050 or 585-924-2186
email: sales@ultrafab.com
Fax: 585-924-7680
1050 Hook Road, Farmington, NY 14425
website: www.ultrafab.com

SPECIFICATIONS

Overall Dimensions:	11" H x 11" W x 11" L OR 8" H x 8" W x 8" L
Electrical:	None
Compressed Air:	None
Weight:	40 lbs
Custom Sizes:	Available