


Tri-Fin®

ULTRAFAB's ultimate pile weatherseal for minimizing air and water infiltration



- Three pliable barrier fins integrated into an assembly with self-supporting pile, and built-in "pile directors", providing the ultimate seal in a pile and fin weatherseal
- Tests have indicated a 25% improvement in air infiltration compared to a single fin
- Solid polypropylene backing inserts more easily, saving time and reducing waste
- Pile height and backing width are always uniform because of ULTRAFAB's unique non-woven manufacturing systems
- Tri-Fin® weatherseals have the structural integrity and consistency which assures a tight seal and barrier against air and water infiltration
- No possibility of off-center pile that binds, breaks or stretches in an extrusion
- ULTRAFAB's unique ultrasonic welding assembles the fin, fibers and backing into an integrated, unified assembly that won't break apart during fabrication or while in use
- Need a softer fin? Ask about Soft Touch Fin®. ULTRAFAB can also provide a combination of Soft Touch Fin® and Ultra Fin®

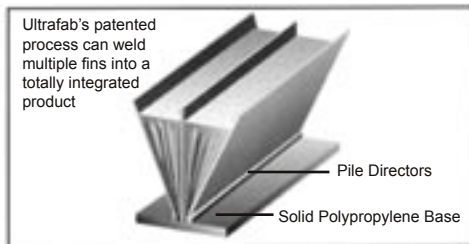

ULTRAFAB®

Tel: 800-535-1050 or 585-924-2186
email: sales@ultrafab.com
Fax: 585-924-7680
1050 Hook Road, Farmington, NY 14425
website: www.ultrafab.com

Tri-Fin® Weatherseal Choices

Pile Heights:

Inch	.200" to .430"
(millimeters)	(5.08) to (10.92)

Pile Densities: Light, Medium, High or Very High

Standard Backing Widths:

Inch	.187	.200	.210	.229	.270	.310
(millimeter)	(4.75)	(5.08)	(5.33)	(5.82)	(6.86)	(7.87)

Backing Options:

Standard	All backing widths
Ultra-Loc®	S7 – All standard backing widths except .229"; Max pile height .430"
	S9 – All standard backing widths including .229"; Max pile height .430"
Ultra-Grip®	All standard backing widths; Max pile height .430"
Adhesive	Available on .187", .270" and .310"

Colors:

Standard:	Black, White, Grey, Beige, Brown
-----------	----------------------------------

TO ORDER: See PART ORDERING SPECIFICATION SHEET