




# Ultra-Loc®

**Lock-in-place Backing  
will not shift or slide  
once inserted**

- Solid polypropylene backing inserts more easily, saving time and reducing waste
- ULTRA LOC® backing has a continuous series of tabs on each side of the backing which align and hold the backing in place
- ULTRA LOC® is available in two versions, S7 which has a .078" tab or S9 which has a .093" tab for added holding power
- No possibility of off-center pile that binds, breaks or stretches in an extrusion
- ULTRA LOC® is designed to be inserted by hand or by an automated process using ULTRAFAB's patented pile insertion equipment

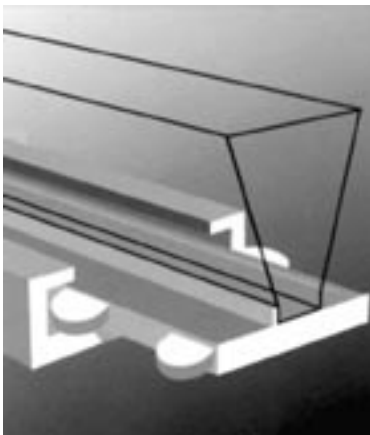

**ULTRAFAB®**

Tel: 800-535-1050 or 585-924-2186  
 email: sales@ultrafab.com  
 Fax: 585-924-7680  
 1050 Hook Road, Farmington, NY 14425  
 website: www.ultrafab.com

## ULTRA LOC® Weatherstripping Choices

### Pile Heights:

Inch	.130" to .500"
(millimeters)	(3.30) to (12.70)

### Pile Densities:

Light, Medium, High or Very High

### Standard Backing Widths:

Inch	.187	.200	.210	.229	.270	.310
(millimeter)	(4.75)	(5.08)	(5.33)	(5.82)	(6.86)	(7.87)

### Backing Options:

Ultra-Loc®	S7 – All standard backing widths except .229"; Max pile height .500"
	S9 – All standard backing widths including .229"; Max pile height .500"

### Colors:

Standard:	Black, White, Grey, Beige, Brown
-----------	----------------------------------

TO ORDER: See PART ORDERING SPECIFICATION SHEET