




Ultra-Reach Fin™

**Ultra-Long, Ultra-Reach
angled fin weatherseals**

- A single pliable barrier fin in a unified assembly with self-supporting pile and built-in “pile directors”, provides an excellent seal with low opening force and low friction
- Solid polypropylene backing inserts more easily, saving time and reducing waste
- Pile height and backing width are always uniform because of ULTRAFAB’s unique non-woven manufacturing systems
- Ultra Reach™ weatherseals have the structural integrity and consistency which assures a tight seal and barrier against air and water infiltration
- No possibility of off-center pile that binds, breaks or stretches in an extrusion
- ULTRAFAB’s unique ultrasonic welding assembles the fin, fibers and backing into an integrated, unified assembly that won’t break apart during fabrication or while in use
- Need more fins or a softer fin?
Ask about Soft Touch Fin®, Tri Fin®, or side fins

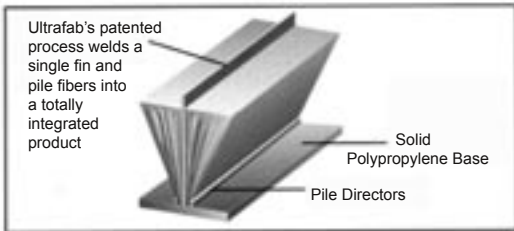

ULTRAFAB

Tel: 800-535-1050 or 585-924-2186
 email: sales@ultrafab.com
 Fax: 585-924-7680
 1050 Hook Road, Farmington, NY 14425
 website: www.ultrafab.com

Ultra-Reach Fin™ Weatherseal Choices

Pile Heights:

Inch	.130" to .750"
(millimeters)	(3.30) to (19.05)

Pile Densities: Light, Medium, High or Very High

Fin Height is: .120" ((3.05mm) above the pile height

Standard Backing Widths:

Inch	.187	.200	.210	.229	.270	.310
(millimeter)	(4.75)	(5.08)	(5.33)	(5.82)	(6.86)	(7.87)

Backing Options:

Standard	All backing widths
Ultra-Loc®	S7 – All standard backing widths except .229"; Max pile height .500"
	S9 – All standard backing widths including .229"; Max pile height .500"
Ultra_Grip®	All standard backing widths; Max pile height .400"
Adhesive	Available on .187", .270" and .310"

Colors:

Standard: Black, White, Grey, Beige, Brown

TO ORDER: See PART ORDERING SPECIFICATION SHEET