


Ultra-Loc®

**Lock-in-place Backing
will not shift or slide
once inserted**

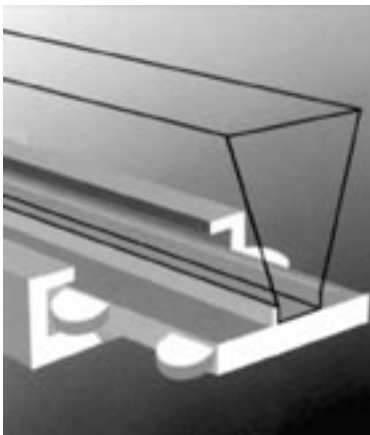

- Solid polypropylene backing inserts more easily, saving time and reducing waste.
- ULTRA LOC® backing has a continuous series of tabs on each side of the backing which align and hold the backing in place. Spacing increments are 6.5" (TYP).
- ULTRA LOC® is available in following dimensional configurations:
 - S7 - Backing extension tabs of .015" minimum
 - S9 - Backing extension tabs of .025" minimum
 - S10 - Backing extension tabs of .030" minimum
- No possibility of off-center pile that binds, breaks or stretches in an extrusion.
- ULTRA LOC® is designed to be inserted by hand or by an automated process using ULTRAFAB's patented pile insertion equipment.

ULTRA LOC® Weatherstripping Choices

Pile Heights:

inch: .130" to .500"

mm: (3.30) to (12.70)

Pile Densities: Light, Medium, High or Very High

Available Backing Widths:

Ultra-Loc® S7 Backing Widths:

inch: .180 .187 .200 .210 .270 .310

mm: 4.57 4.75 5.08 5.33 6.86 7.87

Max pile height .500"

S9 Backing Widths:

inch: .180 .187 .200 .210 .229 .270 .310

mm: 4.57 4.75 5.08 5.33 5.82 6.86 7.87

Max pile height .500"

S10 Backing Widths:

inch: .187 .270

mm: 4.75 6.86

Max pile height .500"

Colors: Standard: Black, White, Grey, Beige, Brown

TO ORDER: SEE PART ORDERING SPECIFICATION SHEET

