


ULTRA FIN®

Our most popular fin product provides an excellent seal with low opening force and friction

Ultrafab's unique ultrasonic welding assembles the fin, fibers, and backing into an integrated, unified assembly that won't break apart during fabrication or while in use

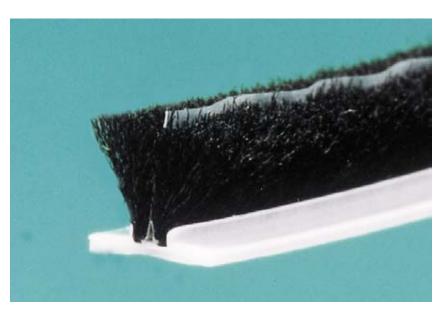

ULTRA FIN WEATHERSEAL FEATURES:

- Ultra Fin weatherseals have a structural integrity and consistency which assures a tight seal and barrier against air and water infiltration
- No possibility of off-center pile that binds, breaks or stretches in an extrusion
- Pile height and backing widths are always uniform because of Ultrafab's unique ultrasonically welded manufacturing system
- Pile Heights: .130" (3.30mm) to .750" (19.05mm)
- Pile Densities: Light, medium, high or very high
- Backing Widths: .180["] (4.57mm), .187["] (4.75mm), .200["] (5.08mm), .210["] (5.33mm), .229["] (5.82mm), .250["] (6.35mm), .270["] (6.86mm), .310["] (7.87mm)

 Backing Options: Standard: Ultra-Loc[®]: 	all backing widths S7 – .180″ (4.57mm), .187″ (4.75mm), .200″ (5.08mm), .210″ (5.33mm), .270″ (6.86mm), .310″ (7.87mm)
	S9 – .180" (4.57mm), .187" (4.75mm), .200" (5.08mm), .210" (5.33mm), .229" (5.82mm), .270" (6.86mm), .310" (7.87mm)
Ultra Grip®:	.180″ (4.57mm), .187″ (4.75mm), .200″ (5.08mm), .229″ (5.82mm), .255″ (6.48mm), .270″ (6.86mm)

Need more fins or a

softer fin? Ask about our Soft Touch Fin[®], Tri-Fin[®], Ultra Reach[®] Fin or Multi-Fin[®]

• Adhesive: Available on .187", .270" and .310"

• Colors: Black, white, grey, beige, and brown