




Member of
Roto Group

METERED INSERTION MACHINES

Designed for insertion
of weatherseals at point
of fabrication.

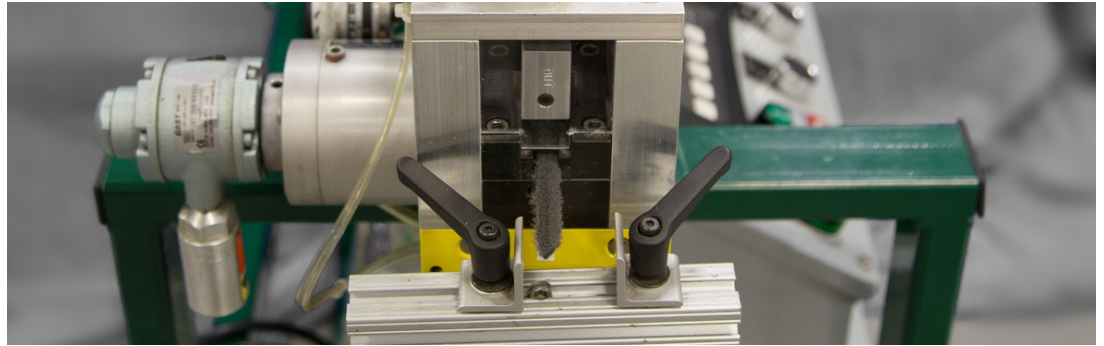

Metered Insertion Machine Specifications

Speed	6ft per second
Profiles	All Configurations
Pile Heights	.140" to .500" (3.6 to 12.7mm)
Backing Width	.187" (4.75mm), .200" (5.08mm), .210" (5.33mm), .229" (5.82mm), .250" (6.35mm), .255" (6.48mm), .270" (6.86mm), .310" (7.87mm)
Electrical	115 VAC 60Hz
Air Pressure	80 psi clean dry air
Dimensions	54" H x 26" W x 36" L
Weight	>106 lbs

Key Features

- Automatically inserts Ultrafab's standard or patented ULTRA LOC® weatherseals into aluminum or vinyl sash and frame lineals
- Problem-free filling at the rate of up to 3,000 feet/hour (6 feet/second)
- Operates with electrical power and compressed air
- Up to 70% increased productivity versus hand pulling insertion
- Durable mechanical design assures safe, reliable operation
- Ultrafab's patented ULTRA LOC® base eliminates gluing or staking of the weatherseal
- Customizable for all sash and frame shapes
- Tail feet option allows for alignment of weatherseal into extrusion.
- Pneumatic brake stops the reel from over-running after each insertion
- Programmable with your desired length and automatically fills the lineal.
- Automatically cuts weatherseal to a tolerance of one inch
- Built-in safety features include tamper-proof fasteners and full guarding
- On-site Training and technical assistance are included with every machine.
- Equipment is available on loan to qualifying customers.



1050 Hook Rd. Farmington, NY 14425
(585)-9214-2186 | Info@ultrafab.com
www.ultrafab.com

