




Member of
Roto Group

NON-METERED INSERTION MACHINES

Designed for insertion
of weatherseals at point
of fabrication.

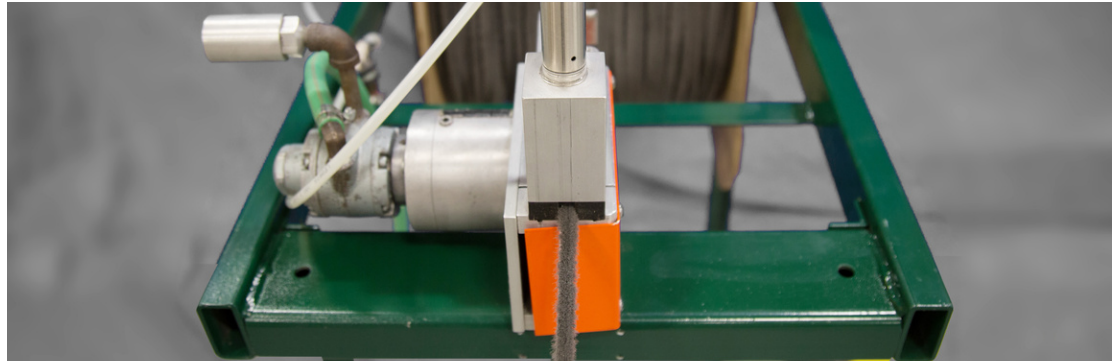

NON- Metered Insertion Machine Specifications

Speed	6ft per second
Profiles	All Configurations
Pile Heights	.140" to .500" (3.6 to 12.7mm)
Backing Width	.187" (4.75mm), .200" (5.08mm), .210" (5.33mm), .229" (5.82mm), .250" (6.35mm), .255" (6.48mm), .270" (6.86mm), .310" (7.87mm)
Air Pressure	80 psi clean dry air
Dimensions	31" H x 17" W x 24" L
Weight	24 lbs



Key Features

- Automatically inserts Ultrafab's standard or patented ULTRA LOC® weatherseals into aluminum or vinyl sash and frame lineals
- Problem-free filling at the rate of up to 3,000 feet/hour (6 ft. per second)
- Operates with compressed air.
- Up to 70% increased productivity versus hand pulling insertion
- Durable mechanical design assures safe, reliable operation
- Ultrafab's patented ULTRA LOC® base eliminates gluing or staking of the weatherseal
- Customizable for all sash and frame shapes
- Pneumatic brake stops the reel from over-running after each insertion
- Pneumatically cuts weatherseal
- Built-in safety features include tamper-proof fasteners and full guarding
- On-site training and technical assistance are included with every machine.
- Equipment is available on loan to qualifying customers.
- Table top mount available to conserve floor space

1050 Hook Rd. Farmington, NY 14425
(585)-9214-2186 | Info@ultrafab.com
www.ultrafab.com

