


Multi-Fin Pile Seals



HIGH PERFORMANCE MULTI-FIN PRODUCTS

Ultrafab is a global leader in innovative sealing solutions offering multi-fin pile weather sealing options that have been designed to meet or exceed the performance requirements for today's most demanding applications.

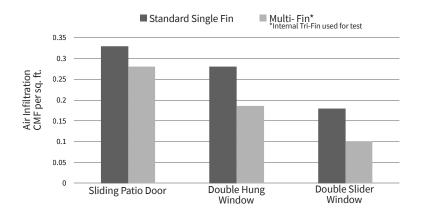



1050 Hook Road | Farmington, NY 14425 (585) 924-2186 | info@ultrafab.com

www.ultrafab.com

KEY ADVANTAGES

- Superior fin height dimensional control ensures maximum air and water penetration resistance
- Tests indicate at least a 20% reduction in air infiltration as compared to single center fin
- Designed to promote consistent ease of insertion
- No off-center pile, due to Ultrafab's patented Ultrasonic welding construction
- Smoother operation and fin containment against all surfaces
- All Multi-Fin seals have silicone treated pile fibers to repel moisture

MULTI-FIN OPTIONS

External Tri-Fin®


- The industry's multi-fin solution for over a decade
- Two external fins and one center fin
- All fins .030" above pile heights
- The outside fins act as the first barrier against air and wind-driven rain

Internal Tri-Fin®

- Aesthetically pleasing with the three fins inserted within the pile fibers
- Designed to promote ease of insertion
- Center fin .030" above pile, outside fins in compression range
- Reduced operating forces and quieter operation
- Encapsulated fins promote superior sealing and compression set resistance

Five-Fin®(patent pending)

- Combines Internal/External fins with a center fin into one pile seal
- Additional fins create additional barriers for a tighter seal against all elements
- Designed to be used in either normal or acoustic applications which require superior sound abatement performance
- Center fin at .030" above pile, both outside and internal fins even with pile and in compression range



Three fins encapsulated by yarn provides superior sealing and compression set resistnace

STANDARD PRODUCT CONFIGURATIONS

PRODUCT TYPE	FIN TYPE	DENSITY	PILE HEIGHT	BACKING WIDTH	BACKING OPTIONS	PILE COLOR
Standard WS	White Soft Touch®	V. High	Minimum = 0.190"	0.187"	Ultra-Loc®	White
Gold Series	Black Soft Touch®	High	Maximum = 0.390"	0.270"	Ultra-Pro®	Grey
	Grey Soft Touch®	Medium		0.310"	Adhesive	Black
	Beige Soft Touch®	Light		Custom backing	Standard	Beige/Tan
	Ultra-Fin® Clear			sizes avialble		

